REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

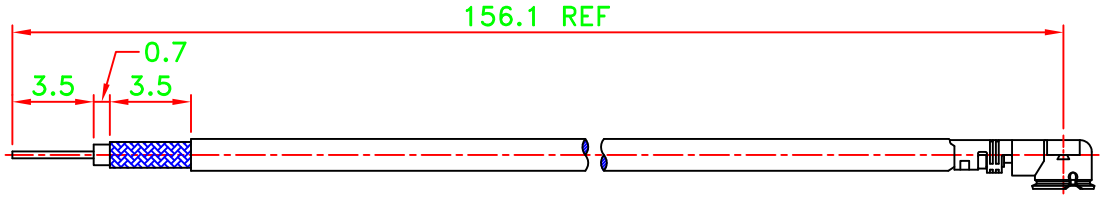

RECOMMENDED
CABLE STRIPPING DIM'S

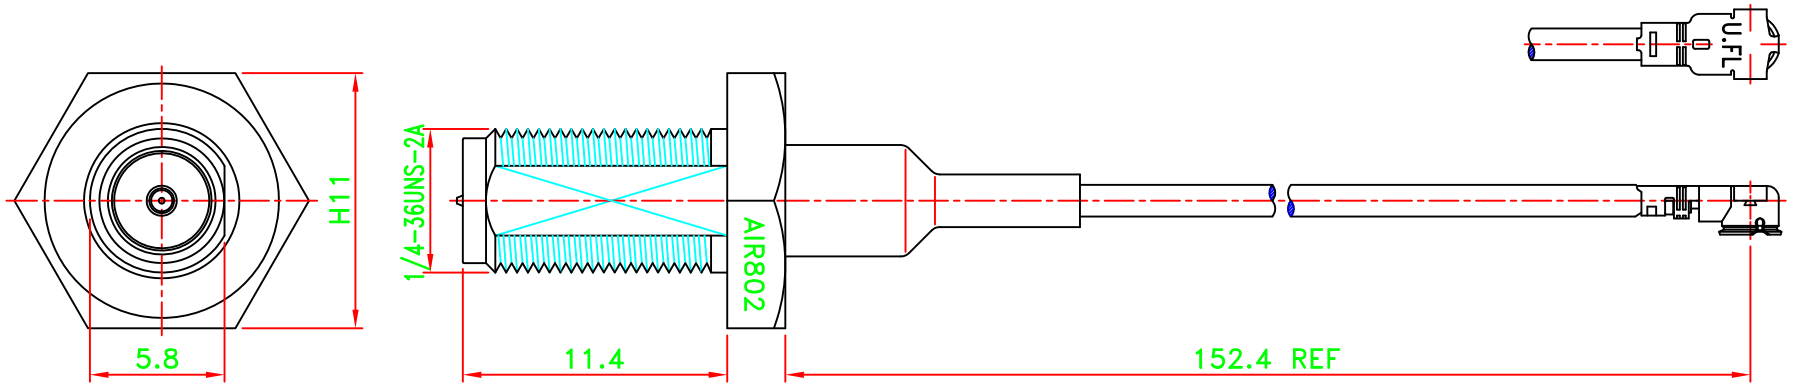



RECOMMENDED
MOUNTING HOLE







AC-20163B

NO	TITLE/DRAWING NO.	Q'TY	MATERIAL	FINISH
4	HEAT SHRINK TUBING	1	POLYOLEFIN	BLACK
3	CABLE(1.37mm)	1		
2	U.FL	1		
1	ASSMA-10462-AG-RP-TGG	1		

PART NO. CA137-RSJBUFL-0061

APPROVED	M. Bryant	DATE 02/27/14
CHECKED		DATE 02/27/14
DRAWN	Wen	DATE 02/27/14

* MAJOR DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±5°

SCALE 3/1 UNIT mm

AIR802

TITLE CABLE ASSEMBLY

DRAWING NO. ASCA-33097-AG1-RP REV A

FILE NO. W:\??~\AS\ASCA\ASCA-33097-AG1-RP AIR802->20140303