

SPECIFICATIONS

1. MATERIAL & FINISH

Housing: Polycarbonate UL94V-0

Contact Blade: Copper Alloy

Conductor: Stranded & Solid Wire, 24AWG, 26AWG
(may be used for wire OD from 1.05 to 1.15mm)





2. MECHANICAL

Cable to Plug Tensile Strength: 20 Pound Minimum

Durability: 200 Mating Cycles

3. TEMPERATURE

-40 to +70C

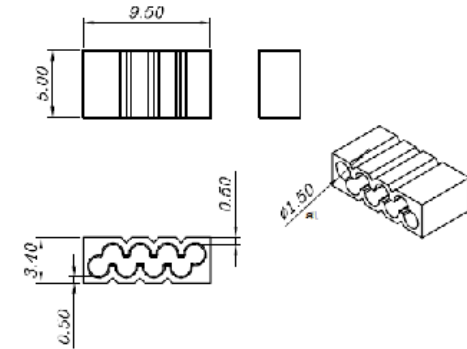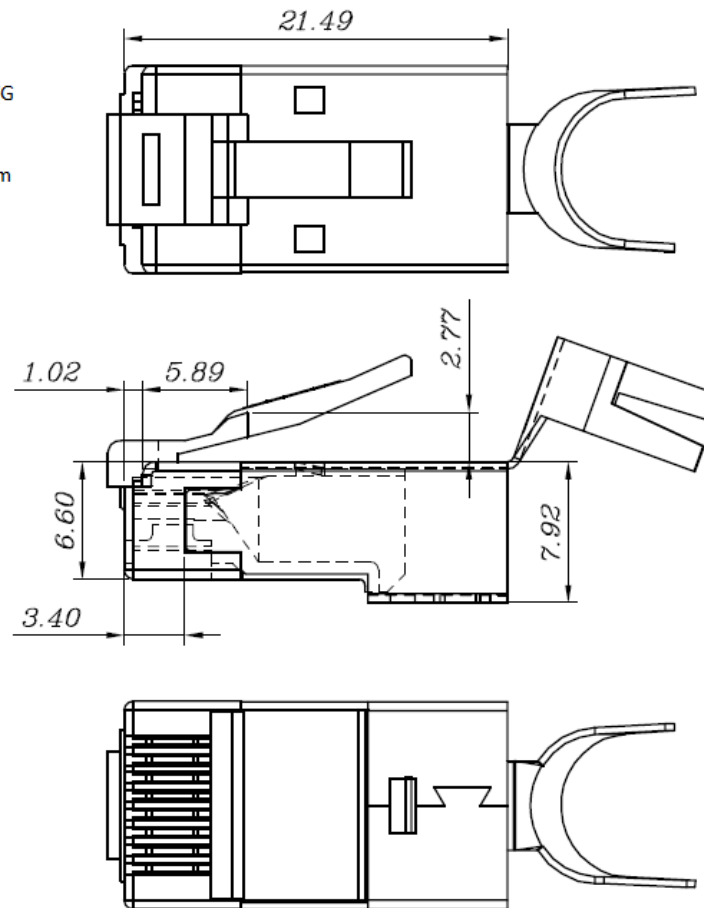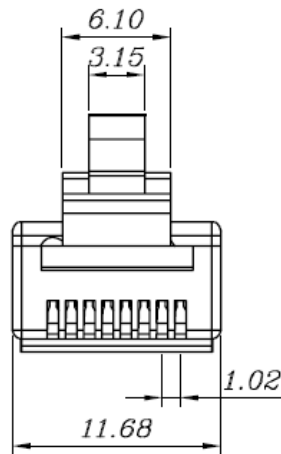

AIR802

Part No: CN-8P8C-HP