
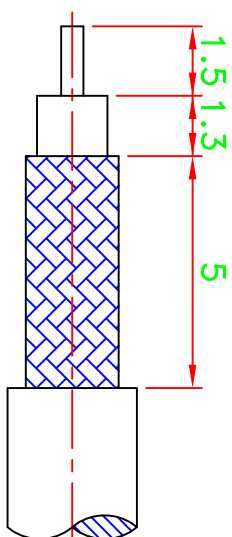




REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED
CONTACT: SOLDER
FERRULE: .128[3.25mm]

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

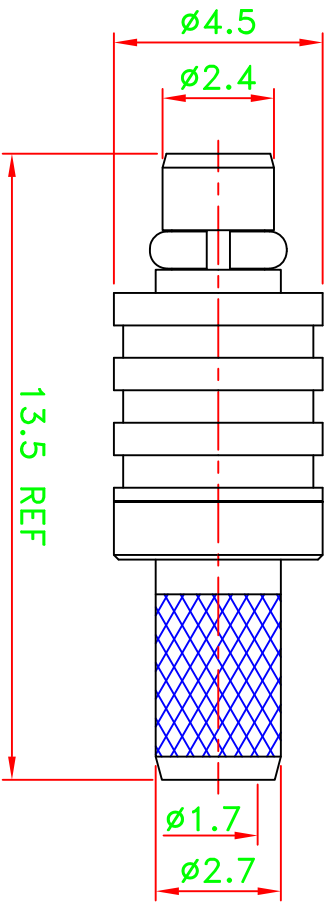

RECOMMENDED
CABLE STRIPPING DIM'S

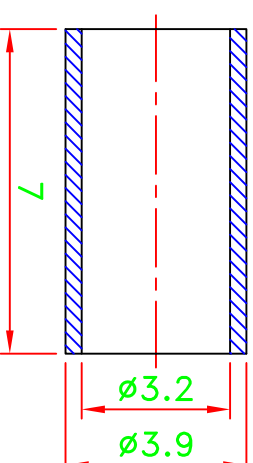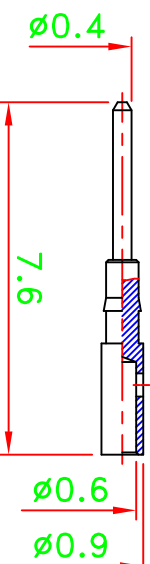

NO	DESCRIPTION/DRAWING NO.	Q'TY	MATERIAL	FINISH
6	FERRULE	1	COPPER	GOLD
5	RETAINING RING	1	BECCU	GOLD
4	BARREL	1	BRASS	GOLD
3	INSULATOR	1	PTFE	NATURAL
2	PIN	1	PHOS. BRONZE	GOLD
1	BODY	1	BRASS	GOLD

PART NO.	APPROVED	CHECKED	DRAWN
CN1MMP	M. Bryant		Kdj
DATE	DATE	DATE	DATE
02/23/16	02/23/16	02/23/16	02/23/16

* MAJOR DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES

0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1.0
ANGLES = ±5°

SCALE	UNIT
6/1	mm

TITLE	DRAWING NO.	REV
AIR802	MMCX CRIMP PLUG	A
FILE NO.	W:\P7\AS\ASMMCX\ASMMCX-80079-L1-TGG	

51C01V000-000

20160225