





REV	DESCRIPTION \ PER REQUEST	DRAWN	DATE

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

CRIMP SIZES REQUIRED  
 CONTACT: SOLDER  
 FERRULE: .128[3.9mm]

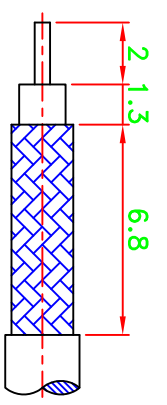

RECOMMENDED  
 CABLE STRIPPING DIM'S

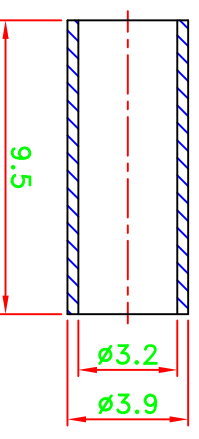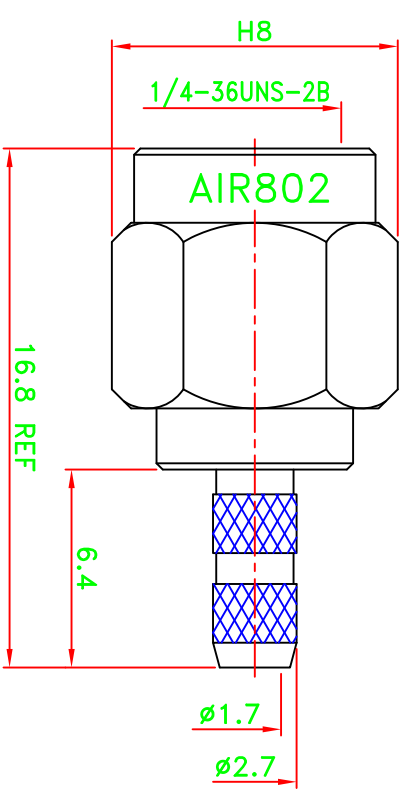

NO	Description	Qty	Material	Finish
7	Ferrule	1	Brass	Gold
6	Shell	1	Brass	Gold
5	Gasket	1	Si-rubber	Orange
4	Retaining ring	1	Brass	Gold
3	Dielectric	1	Teflon	None
2	Pin	1	Brass	Gold
1	Body	1	Brass	Gold

70C01V100-000

STAMP: AIR802

PART NO.	CN1RSP
APPROVED	M. Bryant
CHECKED	
DRAWN	Wen
DATE	08/30/12
DATE	08/30/12
DATE	08/30/12
SCALE	4/1
UNIT	mm
UNLESS OTHERWISE NOTED TOLERANCES	0.5-6 = ±0.2
	6-30 = ±0.4
	30-120 = ±0.6
	120-315 = ±1.0
	ANGLES = ±1°

TITLE	SMA REVERSE POLARITY CRIMP PLUG
DRAWING NO.	ASSMA-10383-L1-RP-TGG
REV	A
FILE NO.	W:\P\A\ASSMA\ASSMA-10383-L1-RP-TGG AIR802->20120831

AIR802 LLC