
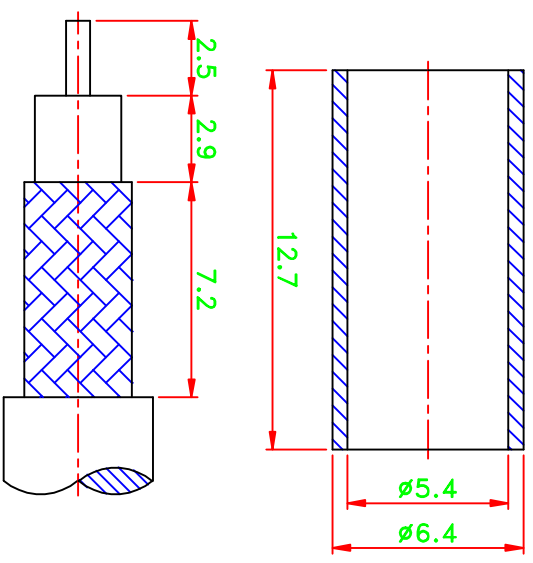


REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

- NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

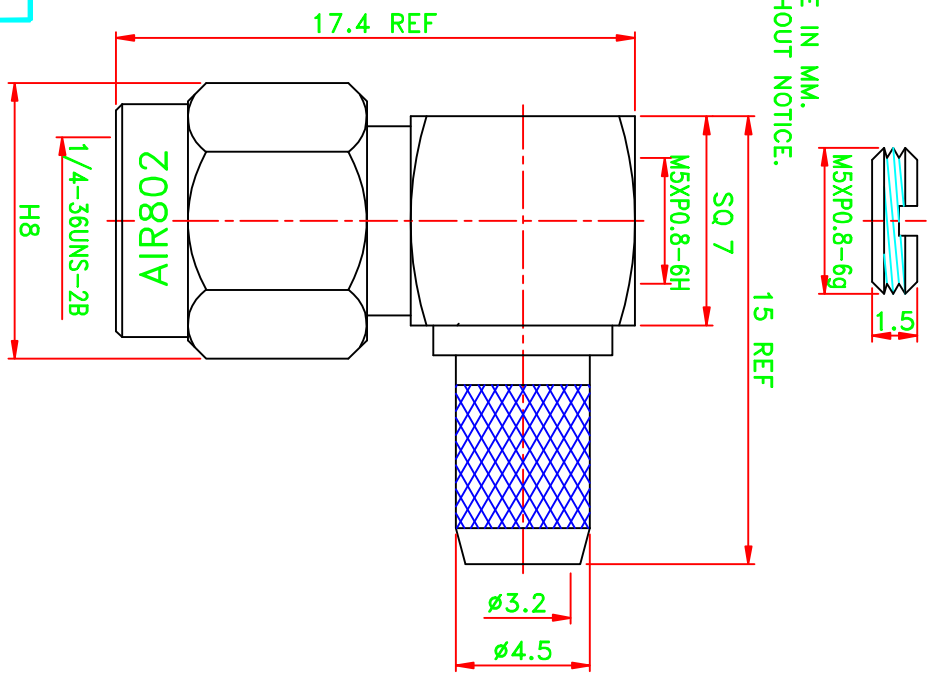

RECOMMENDED
 CABLE STRIPPING DIM'S

STAMP: AIR802

CRIMP SIZES REQUIRED
 CONTACT: Solder
 FERRULE: .213" [5.4mm]

9	Ferrule	1	Brass	Nickel
8	Nut	1	Brass	Nickel
7	Shell	1	Brass	Nickel
6	Gasket	1	SI-rubber	Orange
5	Retaining ring	1	Brass	Nickel
4	Press fit ferrule stud	1	Brass	Nickel
3	Dielectric	1	Teflon	None
2	Pin	1	Phos Bronze	Gold
1	Body	1	Brass	Nickel
NO	Description	Q'ty	Material	Finish

70C01R101-001

PART NO.	CN2RSPRA
APPROVED	M. Bryant
DATE	03/09/11
CHECKED	
DATE	03/09/11
DRAWN	WEN
DATE	03/09/11

* MAJOR DIMENSION	UNLESS OTHERWISE NOTED
0.5-6 = ±0.2	6-30 = ±0.4
30-120 = ±0.6	120-315 = ±1.0
ANGLES = ±1°	
SCALE	4/1
UNIT	mm

TITLE	SMA R/P RIGHT ANGLE CRIMP PLUG
DRAWING NO.	ASSMA-10368-F-RP-TGN
REV	A
FILE NO.	W:\ASSMA\ASSMA-10368-F-RP-TGN
DIANA	>20110309