
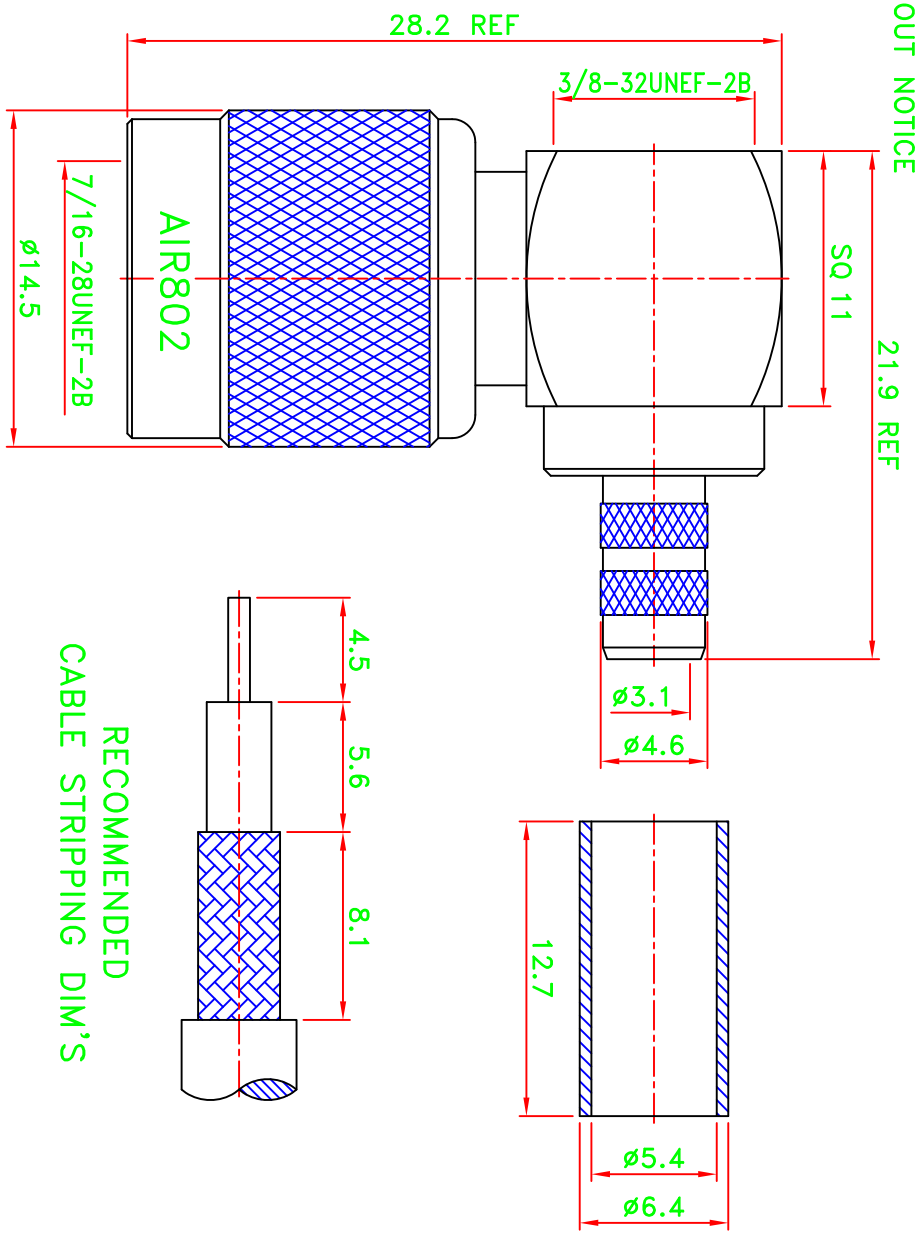


REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

CRIMP SIZES REQUIRED
CONTACT: SOLDER
FERRULE: .213[5.4mm]



RECOMMENDED
CABLE STRIPPING DIM'S

15C01R101-000

STAMP: AIR802

NO	Description	Qty	Material	Finish
11	Nut	1	Brass	Nickel
10	Ferrule	1	Brass	Nickel
9	Shell	1	Brass	Nickel
8	Gasket	1	Rubber	Red
7	Retaining ring	1	SK-5	Nickel
6	Dielectric	1	Delrin	None
5	Washer	1	Brass	Nickel
4	Dielectric	1	Teflon	None
3	Pin	1	Brass	Gold
2	Body	1	Brass	Nickel
1	Body	1	Brass	Nickel

PART NO.		UNLESS OTHERWISE NOTED TOLERANCES		* MAJOR DIMENSION	
CN2RTPRA		0.5-6 = ±0.2	6-30 = ±0.4	SCALE	3/1
APPROVED	M. BRYANT	30-120 = ±0.6	120-315 = ±1.0	UNIT	mm
CHECKED		ANGLES = ±1°		FILE NO.	W:\ppr\jas\ASTNC\ASTNC-15154-F-RP-50-TGN
DRAWN	WEN	DATE	02/08/12	DRAWING NO.	ASTNC-15154-F-RP-50-TGN
DATE		02/08/12		REV	A
DATE		02/08/12		TITLE	
DATE		02/08/12		TNC RIGHT ANGLE R/P CRIMP PLUG	

AIR802 LLC