





REV	DESCRIPTION\PER REQUEST	DRAWN	DATE
B	Modify to improve pull/pressure force	Wen	02/06/17

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

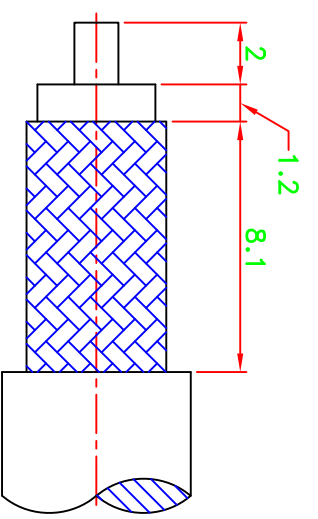

RECOMMENDED  
 CABLE STRIPPING DIM'S

CRIMP SIZES REQUIRED  
 CONTACT: SOLDER  
 FERRULE: .256[6.5mm]

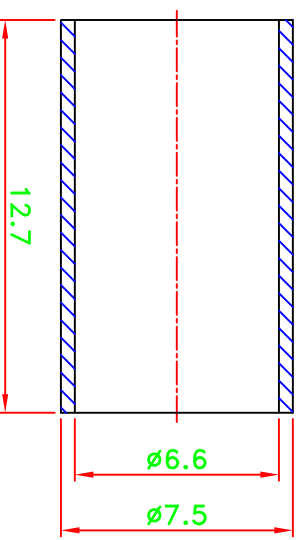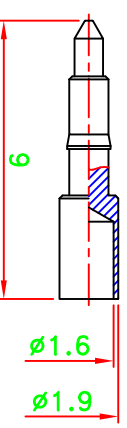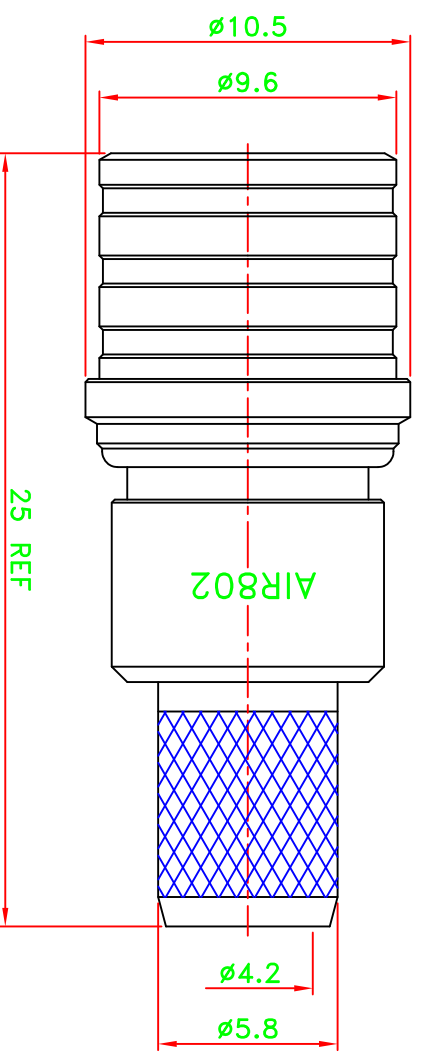

NOTES:FINISH(PLATING THICKNESS IN MICRO-INCHES)  
 1.COPPER-TIN-ZINC PL. 100 MIN THICK OVER  
 COPPER STRIKE

STAMP:AIR802

NO	DESCRIPTION/DRAWING NO.	Q'TY	MATERIAL	FINISH
6	FERRULE	1	COPPER	NOTE 1
5	SHELL	1	BRASS	NOTE 1
4	GROUNDING	1	PHOS BRONZE	NOTE 1
3	INSULATOR	1	PTFE	NATURAL
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	NOTE 1

10C01V004-000

PART NO. CN3QMAP-TM		* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES		TITLE QMA CRIMP PLUG	
APPROVED	DATE	0.5-6=±0.2	6-30=±0.4	DRAWING NO.	REV
M. Bryant	02/06/17	30-120=±0.6	120-315=±1.0	ASQMA-32004-Z	B
CHECKED	DATE	ANGLES=±5°		FILE NO. W:\??\ASQMA\ASQMA-32004-Z AIR802->20170206	
Wen	02/06/17				
DRAWN	DATE	SCALE	UNIT		
Wen	02/06/17	4/1	mm		