





REV	DESCRIPTION \ PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED
CONTACT: SOLDER
FERRULE: .256" [6.5mm]

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

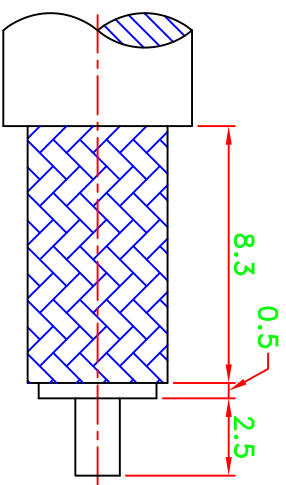

RECOMMENDED
CABLE STRIPPING DIM'S

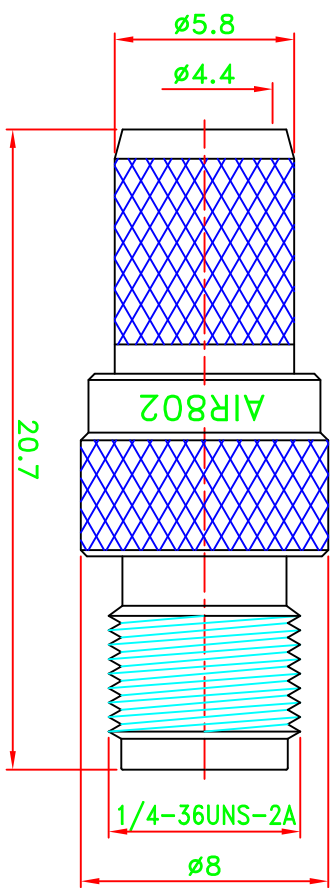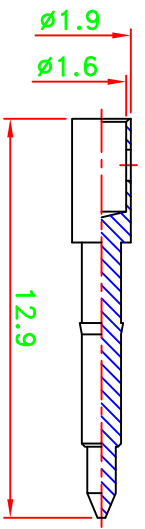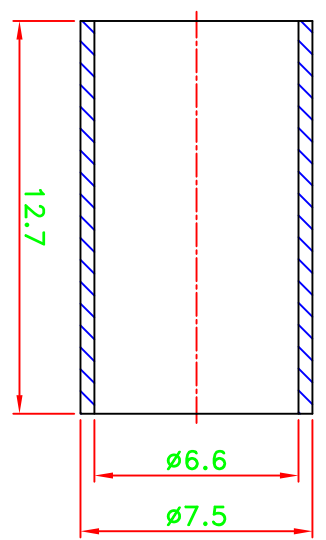

STAMP: AIR802

NO	Description	Qty	Material	Finish	PART NO.	APPROVED	CHECKED	DRAWN	DATE	* MAJOR DIMENSION	UNLESS OTHERWISE NOTED TOLERANCES	SCALE	UNIT	FILE NO.	TITLE	DRAWING NO.	REV
4	Ferrule	1	Brass	Nickel	CN3RSJ	M. Bryant		Wen	12/20/12	0.5-6 = ±0.2	6-30 = ±0.4	4/1	mm	W:\72~\AS\ASSMA\ASSMA-10299-U1-RP-TGN	SMA REVERSE POLARITY CRIMP JACK	ASSMA-10299-U1-RP-TGN	A
3	Dielectric	1	Teflon	None					12/20/12	30-120 = ±0.6	120-315 = ±1.0						
2	Pin	1	Brass	Gold					12/20/12	ANGLES = ±1°							
1	Body	1	Brass	Nickel					12/20/12								

AIR802 LLC