

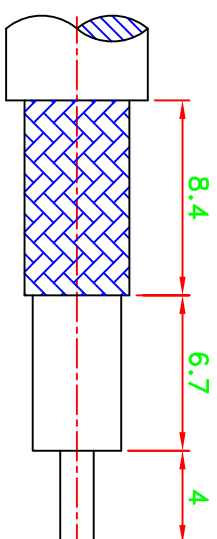
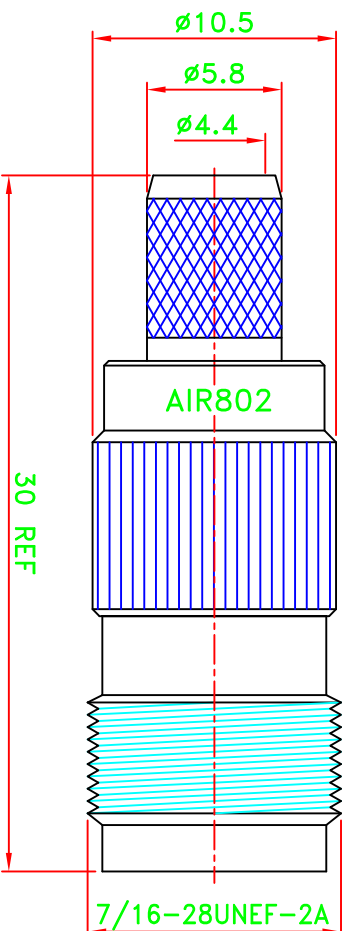


REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED
CONTACT: .068[1.75mm]
FERRULE: .256[6.5mm]



RECOMMENDED
CABLE STRIPPING DIM'S

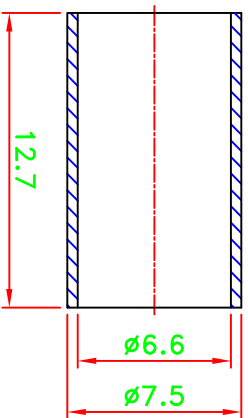

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

STAMP: AIR802

NO	Description	Qty	Material	Finish	PART NO.	APPROVED	CHECKED	DRAWN	DATE	SCALE	UNIT	mm	TITLE	FILE NO.	REV
5	Ferrule	1	Brass	Nickel	CN3RTJ	M. Bryant		Kdi	08/10/12	3/1	mm		AIR802 LLC	W:\P\A\AS\ASBNC\ASTNC-15162-Z-RP-50-TGN	A
4	Dielectric	1	Teflon	None									TNC REVERSE POLARITY CRIMP JACK		
3	Pin	1	Brass	Gold											
2	Body	1	Brass	Nickel											
1	Body	1	Brass	Nickel											

* MAJOR DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES

- 0.5-6 = ±0.2
- 6-30 = ±0.4
- 30-120 = ±0.6
- 120-315 = ±1.0
- ANGLES = ±1°