



REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED  
CONTACT: SOLDER  
FERRULE: .256[6.5mm]



- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. AT ANY TIME.

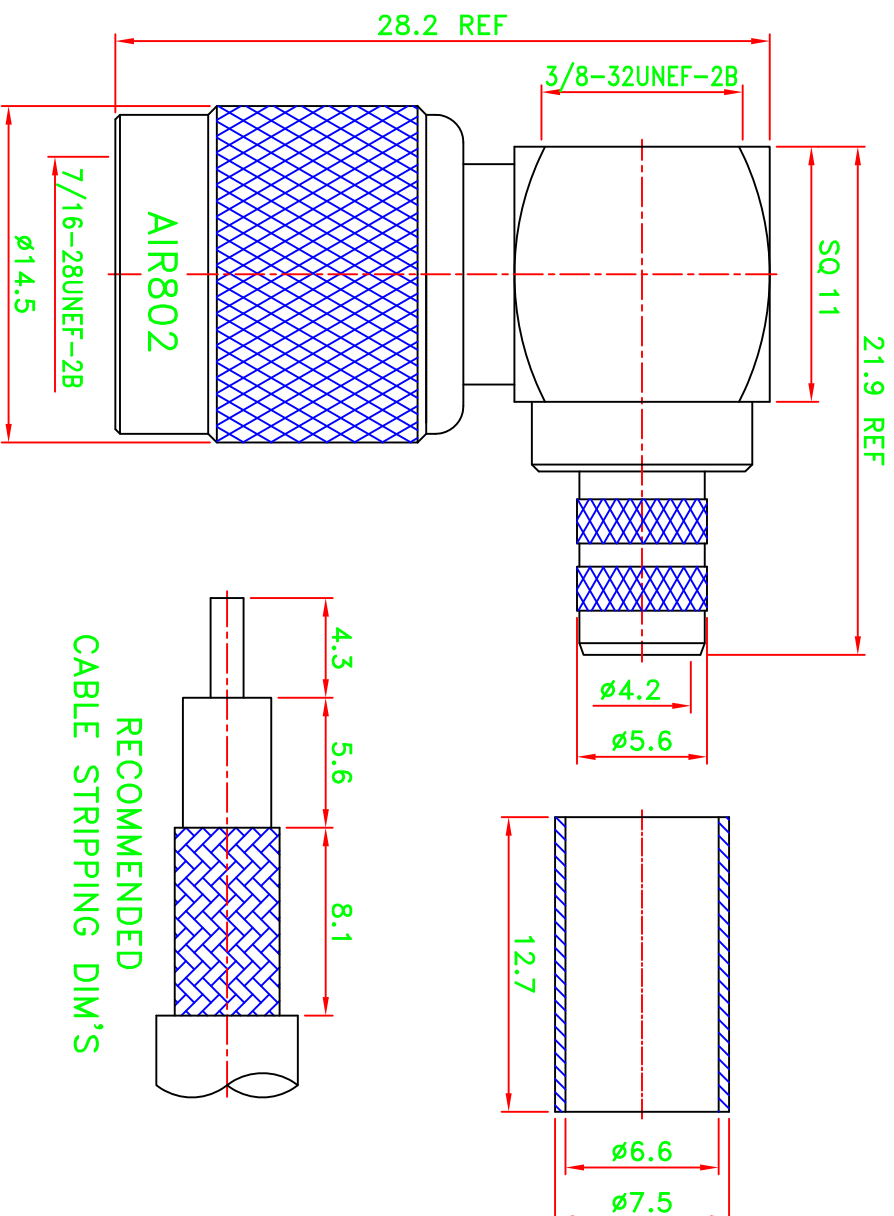

STAMP: AIR802

NO	DESCRIPTION/DRAWING NO.	QTY	MATERIAL	FINISH
11	SCREW	1	BRASS	NICKEL
10	FERRULE	1	COPPER	NICKEL
9	SHELL	1	BRASS	NICKEL
8	GASKET	1	RUBBER	RED
7	RETAINING RING	1	SK5	NICKEL
6	INSULATOR	1	POM	NATURAL
5	WASHER	1	BRASS	NICKEL
4	INSULATOR	1	PTFE	NATURAL
3	PIN	1	BRASS	GOLD
2	BODY	1	BRASS	NICKEL
1	BODY	1	BRASS	NICKEL

15C01R101-001

PART NO.	CN3RTPRA
APPROVED	M. Bryant
CHECKED	
DRAWN	Wen
DATE	05/07/15
DATE	05/07/15
DATE	05/07/15
SCALE	3/1
UNIT	mm
UNLESS OTHERWISE NOTED TOLERANCES	0.5-6 = ±0.2
	6-30 = ±0.4
	30-120 = ±0.6
	120-315 = ±1.0
	ANGLES = ±5°

RECOMMENDED  
CABLE STRIPPING DIM'S

**AIR802**

TITLE  
TNC R/A REVERSE POLARITY CRIMP PLUG

DRAWING NO.  
ASTNC-15154-Z-RP-50-TGN

FILE NO. W:\P2\AST\ASTNC\ASTNC-15154-Z-RP-50-TGN AIR802-->20150508

REV A