

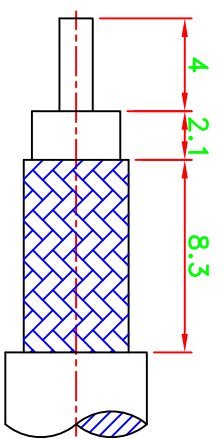
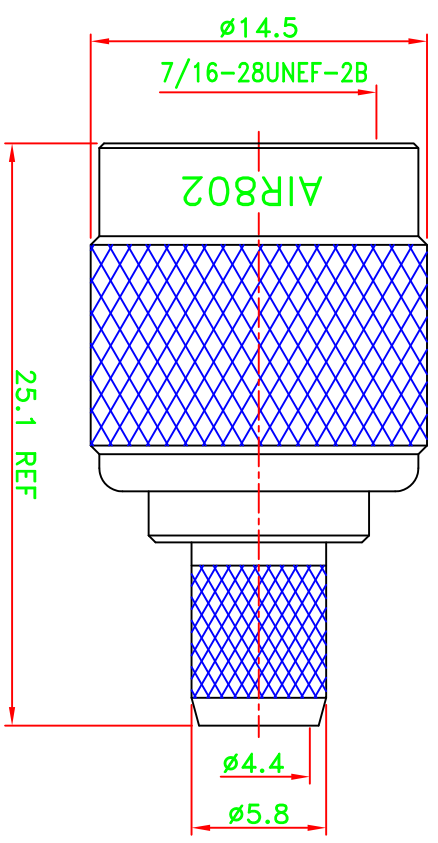


REV	DESCRIPTION \ PER REQUEST	DRAWN	DATE

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

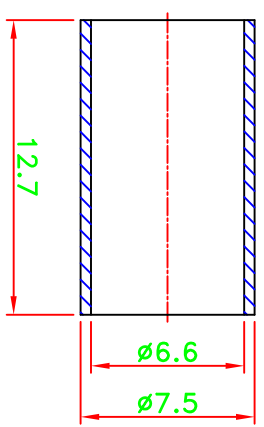

RECOMMENDED
 CABLE STRIPPING DIM'S

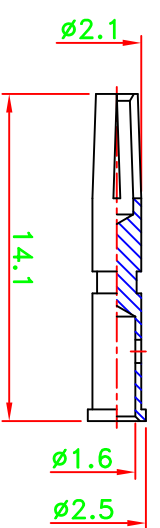

STAMP: AIR802

CRIMP SIZES REQUIRED
 CONTACT: .068[1.75mm]
 FERRULE: .256[6.5mm]

NO	Description	Qty	Material	Finish
9	Ferrule	1	Brass	Nickel
8	Shell	1	Brass	Nickel
7	Gasket	1	Rubber	Red
6	Retaining ring	1	SK5	Nickel
5	Dielectric	1	Delrin	None
4	Washer	1	Brass	Nickel
3	Dielectric	1	Teflon	None
2	Pin	1	Brass	Gold
1	Body	1	Brass	Nickel

PART NO.	CN3RTP
APPROVED	M. Bryant
CHECKED	
DRAWN	Kdi
DATE	08/13/12

* MAJOR DIMENSION
 UNLESS OTHERWISE NOTED TOLERANCES

0.5-6 = ± 0.2
 6-30 = ± 0.4
 30-120 = ± 0.6
 120-315 = ± 1.0
 ANGLES = ± 1.0

SCALE	3/1	UNIT	mm
-------	-----	------	----

AIR802 LLC

TNC REVERSE POLARITY CRIMP PLUG

DRAWING NO. ASTNC-15163-Z-RP-50-TGN

FILE NO. W:\P\A\ASTNC\ASTNC-15163-Z-RP-50-TGN

REV A