

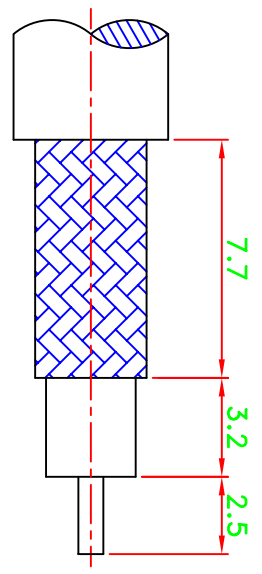
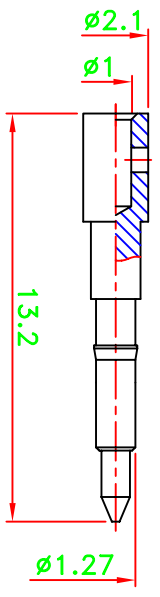


REV	DESCRIPTION \ PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED
CONTACT: SOLDER
FERRULE: .213" [5.4mm]

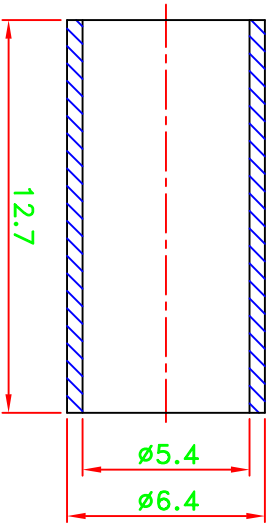

RECOMMENDED
CABLE STRIPPING DIMENSIONS

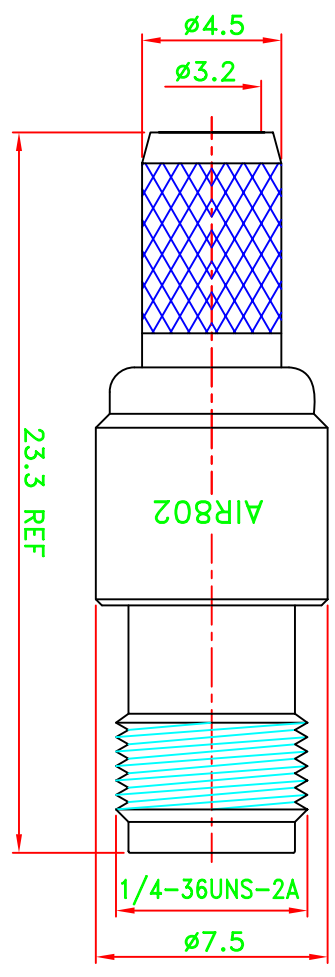

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

NO	Description	Qty	Material	Finish
5	Ferrule	1	Brass	Nickel
4	Press fit ferrule stud	1	Brass	Nickel
3	Dielectric	1	Teflon	None
2	Pin	1	Brass	Gold
1	Body	1	Brass	Nickel

PART NO.	CN2RSJ	* MAJOR DIMENSION	UNLESS OTHERWISE NOTED TOLERANCES	TITLE	SMR REVERSE POLARITY CRIMP JACK
APPROVED	M. Bryant	DATE	04/24/07	DRAWING NO.	ASSMA-10268-F-RP-TGN
CHECKED		DATE	04/24/07	FILE NO.	D:\msd\AS\ASSMA\ASSMA-10268-F-RP-TGN AIR802->20071210
DRAWN	Kdi	DATE	04/24/07	SCALE	4/1
		UNIT	mm	ANGLES	±1°
		REV	A		

AIR802 LLC