
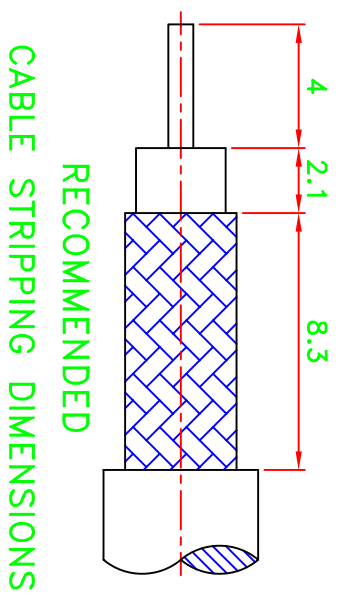


REV	DESCRIPTION \ PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED
CONTACT: .068" [1.7mm]
FERRULE: .213" [5.4mm]

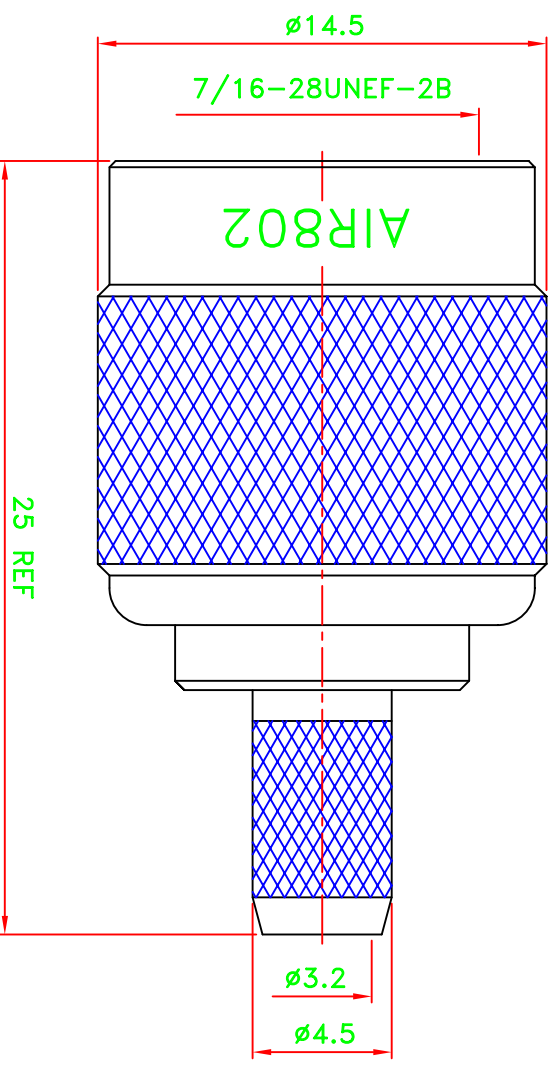



RECOMMENDED
CABLE STRIPPING DIMENSIONS

NO	Description	Qty	Material	Finish
8	Ferrule	1	Brass	Nickel
7	Shell	1	Brass	Nickel
6	Gasket	1	Rubber	Red
5	Retaining ring	1	SK-5	Nickel
4	Sleeve	1	Brass	Nickel
3	Dielectric	1	Teflon	None
2	Pin	1	Brass	Gold
1	Body	1	Brass	Nickel

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

PART NO.	CN2RTP
APPROVED	M. Bryant
CHECKED	
DRAWN	Kdi
DATE	10/22/07

* MAJOR DIMENSION	UNLESS OTHERWISE NOTED TOLERANCES
	0.5-6 = ±0.2
	6-30 = ±0.4
	30-120 = ±0.6
	120-315 = ±1.0
	ANGLES = ±1.0

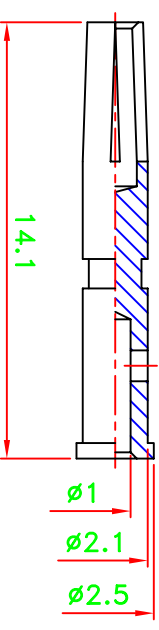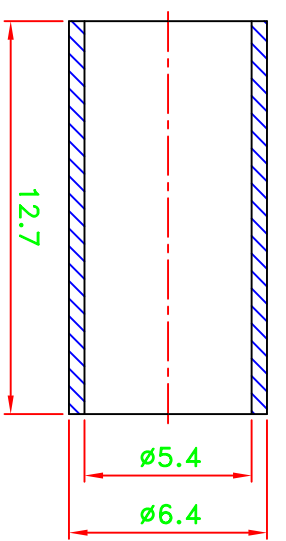

TITLE	TNC REVERSE POLARITY CRIMP PLUG
DRAWING NO.	ASTNC-15109-F-RP-50-TGN
FILE NO. W:\AS\ASTNC\ASTNC-15109-F-RP-50-TGN	REV A
SCALE	4/1
UNIT	mm
SCALE	4/1
UNIT	mm

AIR802 LLC